



Quick Start Guide^{1.}

Welcome to TwittLED from Messagemaker Displays. Before you can display your Tweets your sign will need to be setup and your software configured:

Connect the TwittLED to the network using the Ethernet cable supplied (plug it into a network point, network hub or a modem)


Power on the TwittLED and wait for it to start up. The sign is DHCP enabled so it will automatically be assigned with an IP Address by the network. Make a note of the IP address once it is assigned to the TwittLED by the network, it will display the new IP Address as part of the start-up message.

www.messagemaker.co.uk

TwittLED Configuration


Customize the Software

1. Insert the TwittLED software installation disk into your PC and double click on TwittLED Setup icon. Follow the onscreen instructions to install the software.




2. Once the installation is complete launch the program. (Fig.1). Enter the IP address assigned to the sign in the COM port/IP Address field and select the output LED colour (applicable only for multi-coloured TwittLED, Leave it to the default value if your sign is single coloured) and then click Connect.

(Fig.1.)

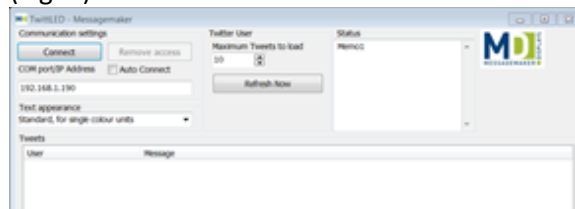

3. An Authorization window will now open (Fig.2). Enter your twitter account credentials and click on **Authorise app** button.

(Fig.2)

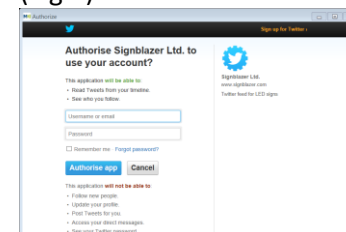

4. After you have entered the correct credentials you will be redirected to the main software interface window.



The latest tweets on your timeline will be loaded into the software and the TwittLED. You can minimise the software window, the Tweets will automatically be updated in real time in the background.

